

Borel

Standard Furnaces & Ovens

since 1918



THERMOLAB FURNACE 1100°C TL 1100

Definition: Electric chamber furnace, testing furnace, not suitable for intensive industrial use.

Construction: Robustly constructed in folded sheet steel, horizontal opening door for 8 liter model, vertical for 3 liter version.

Insulation: Light fibres for all walls.

Aeration: Air hole in the door, or at the back according to model.

Heating: Heating muffle. Heating interruption on door opening.

Electricity: Single-phase 230 VAC, 50 Hz.


Regulation: Axron Swiss PID temperature controller.

Documentation: CE marking and operating instructions in English.

Delivered with: Removable ceramic sole.



Photos for illustration purposes only

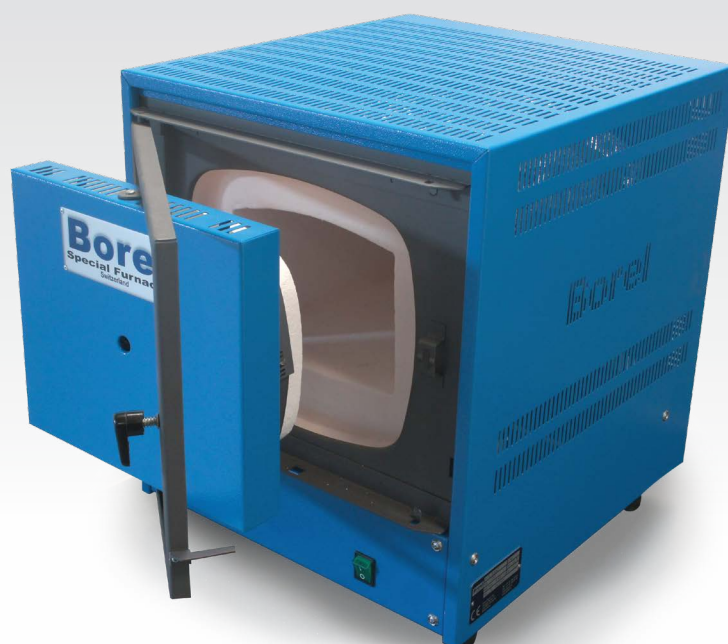

MODEL	ITEM CODE	Int. Vol. (L)	Int. Dim. (WxHxD) (mm)	Ext. Dim. (WxHxD) (mm)	Power (kW)	Weight (kg)
TL 1100-3	G200282	3.0	120 x 105 x 200	345 x 430 x 470	1.7	18
TL 1100-8	G200281	8.2	195 x 135 x 310	440 x 495 x 530	1.8	28

SOLO Swiss SA

Grandes-Vies 25, 2900 Porrentruy, Switzerland - Tel. +41 (0)32 756 64 00 - borel@soloswiss.com - www.borelswiss.com

* V 28.01.2022

Specifications subject to change